




Bearing Accessories

DESDE 1957

ISO 9001

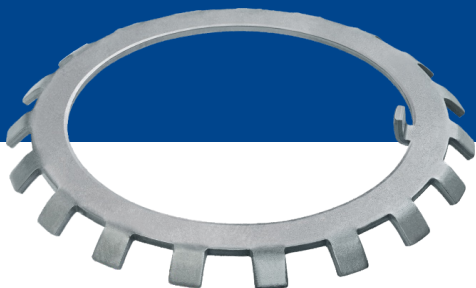


AW Lock Washers

AW lock washers are designed to provide safety and stability in assemblies that use AN and KM locknuts.

Manufactured with metric dimensions. they feature:

- External teeth with a 25° inclination.
- An internal tab bent on the opposite side of the external teeth.

CÓDIGO	d	Ds	D	S	E	F	M	S2	H
AW 2	15	28	21	1.06	4	13.5	4	2.5	R1.0
AW 3	17	32	24	1.06	4	15.5	4	2.5	R1.0
AW 4	20	36	26	1.06	4	18.5	4	2.5	R1.0
AW 5	25	42	32	1.2	5	23	5	2.5	R1.0
AW 6	30	49	38	1.2	5	27.5	5	2.5	R1.0
AW 7	35	57	44	1.2	6	32.5	5	2.5	R1.0
AW 8	40	62	50	1.2	6	37.5	6	2.5	R1.0
AW 9	45	69	56	1.2	6	42.5	6	2.5	R1.0
AW 10	50	74	61	1.2	6	47.5	6	2.5	R1.0
AW 11	55	81	67	1.2	8	52.8	7	4	R1.0
AW 12	60	86	73	1.5	8	57.5	7	4	R1.2
AW 13	65	92	79	1.5	8	62.5	7	4	R1.2
AW 14	70	98	85	1.5	8	66.5	8	4	R1.2
AW 15	75	104	90	1.5	8	71.5	8	4	R1.2
AW 16	80	112	95	1.9	10	76.5	8	4	R1.2
AW 17	85	119	102	1.8	10	81.5	8	4	R1.2
AW 18	90	126	108	1.9	10	86.5	10	4	R1.2
AW 19	95	133	113	1.9	10	91.5	10	4	R1.2
AW 20	100	142	120	1.9	12	96.5	10	6	R1.2
AW 22	110	154	133	1.9	12	105.5	12	6	R1.2
AW 23	115	159	137	1.9	12	110.5	12	6	R1.5
AW 24	120	164	138	1.9	14	115	12	6	R1.5
AW 26	130	175	149	1.9	14	125	12	6	R1.5
AW 28	140	192	160	1.9	16	135	14	8	R1.5
AW 29	145	202	171	1.9	16	140	14	8	R1.5
AW 30	150	202	171	1.9	16	145	14	8	R1.5
AW 32	160	217	182	2.65	18	154	16	8	R1.5
AW 34	170	232	193	2.65	18	164	16	8	R1.5
AW 36	180	242	203	2.65	20	174	18	8	R1.5
AW 38	190	252	214	2.65	20	184	18	8	R1.5
AW 40	200	262	226	2.65	20	194	18	8	R1.5
AW 44	220	292	250	3	24	213	20	10	R2.0

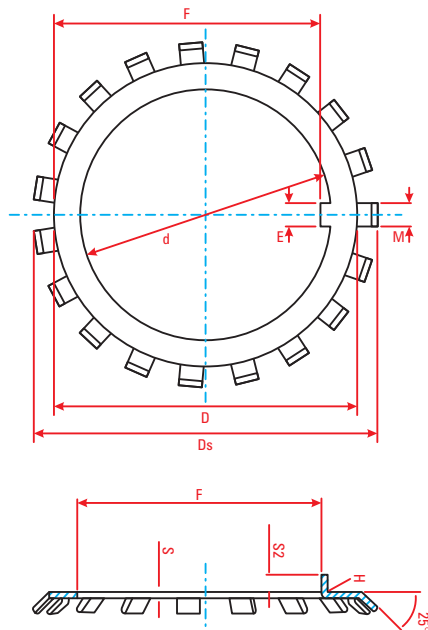

Since 1957

+55 19 3451.8210 • +55 19 99155.1332
info@bgl.com.br • www.bgl.com.br/en

